
## Let's connect

## Notes

- Be sure to turn off all the equipment before making any connections.
- Do not connect/disconnect the camera cable with the power on. Doing so may damage the Camera Unit or Communication Terminal.

## Connect the TV monitor.

Connect the TV monitor and Communication Terminal using the supplied audio cable and S-video cable.

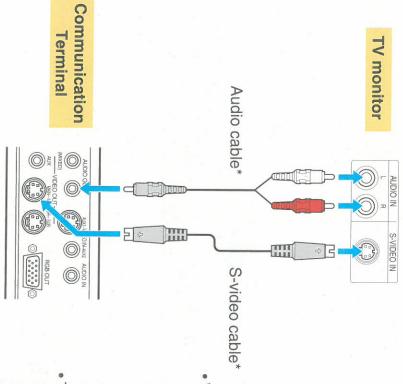

- When connecting a second monitor, use the VIDEO OUT MONITOR
  SUB or the RGB OUT connector on the Communication Terminal, or the RGB OUT connector on the Data
  Solution Box. For details, refer to the Operating Instructions.
- The AUDIO OUT (MIXED) jack is used to make an audio recording of a conference. This is not used during regular conferences.

\* supplied