


CONNECTION GUIDES

PlayStation 3 and PlayStation 4

English

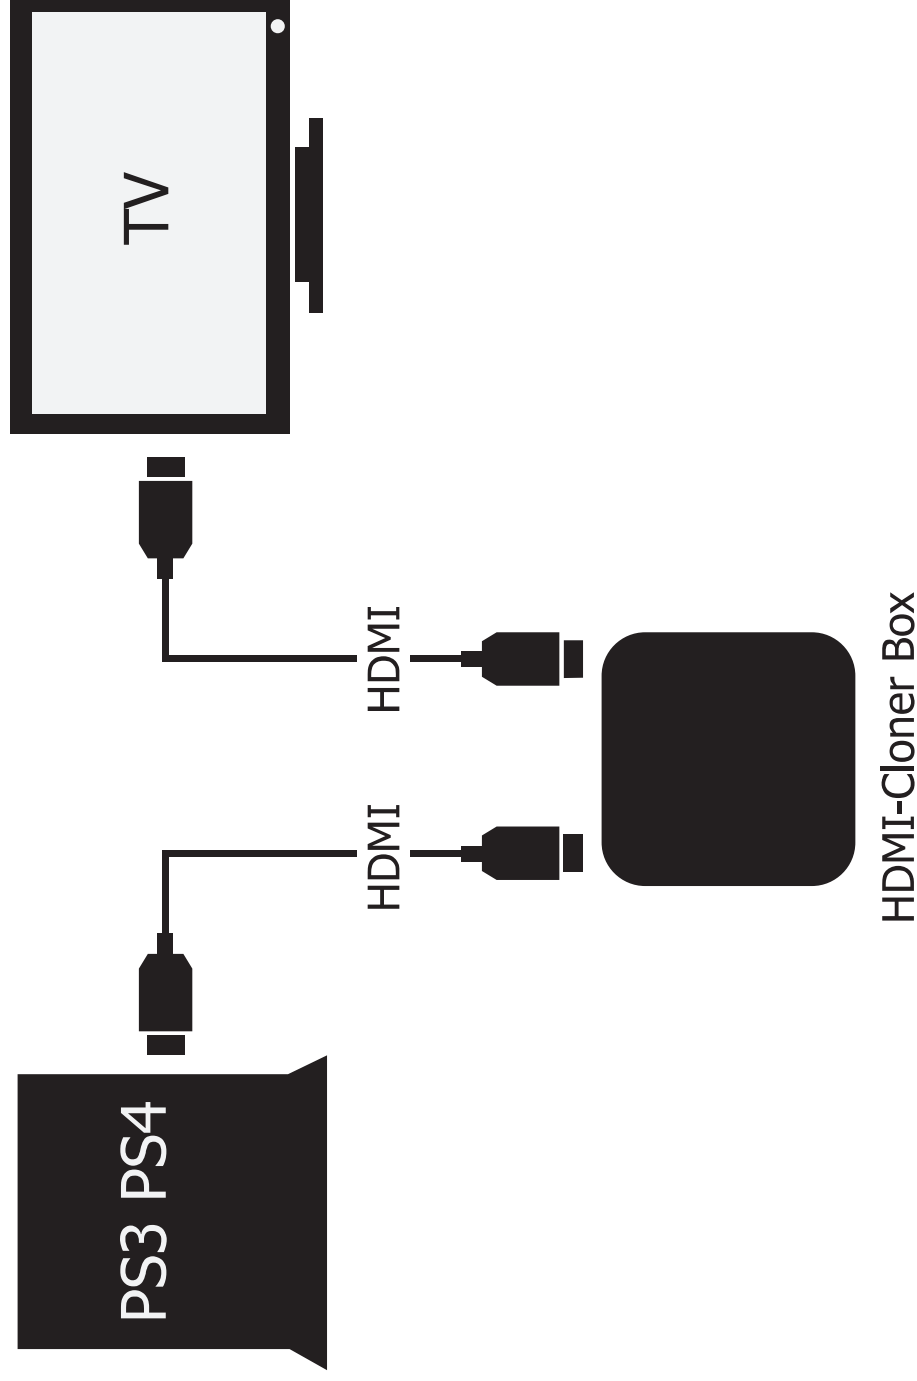


CONNECTION GUIDES

English

1. Make sure the PS3/PS4 video/audio output settings are set up correctly before you begin.
2. Connect the other end of the HDMI cable into HDMI-Cloner Box.
3. Connect HDMI-Cloner Box to TV via an HDMI cable.
4. Make sure gameplay is visible on TV screen.
5. Connect the HDD or USB stick to the USB port on HDMI-Cloner Box.

CONNECTION GUIDES

Xbox 360 and Xbox One

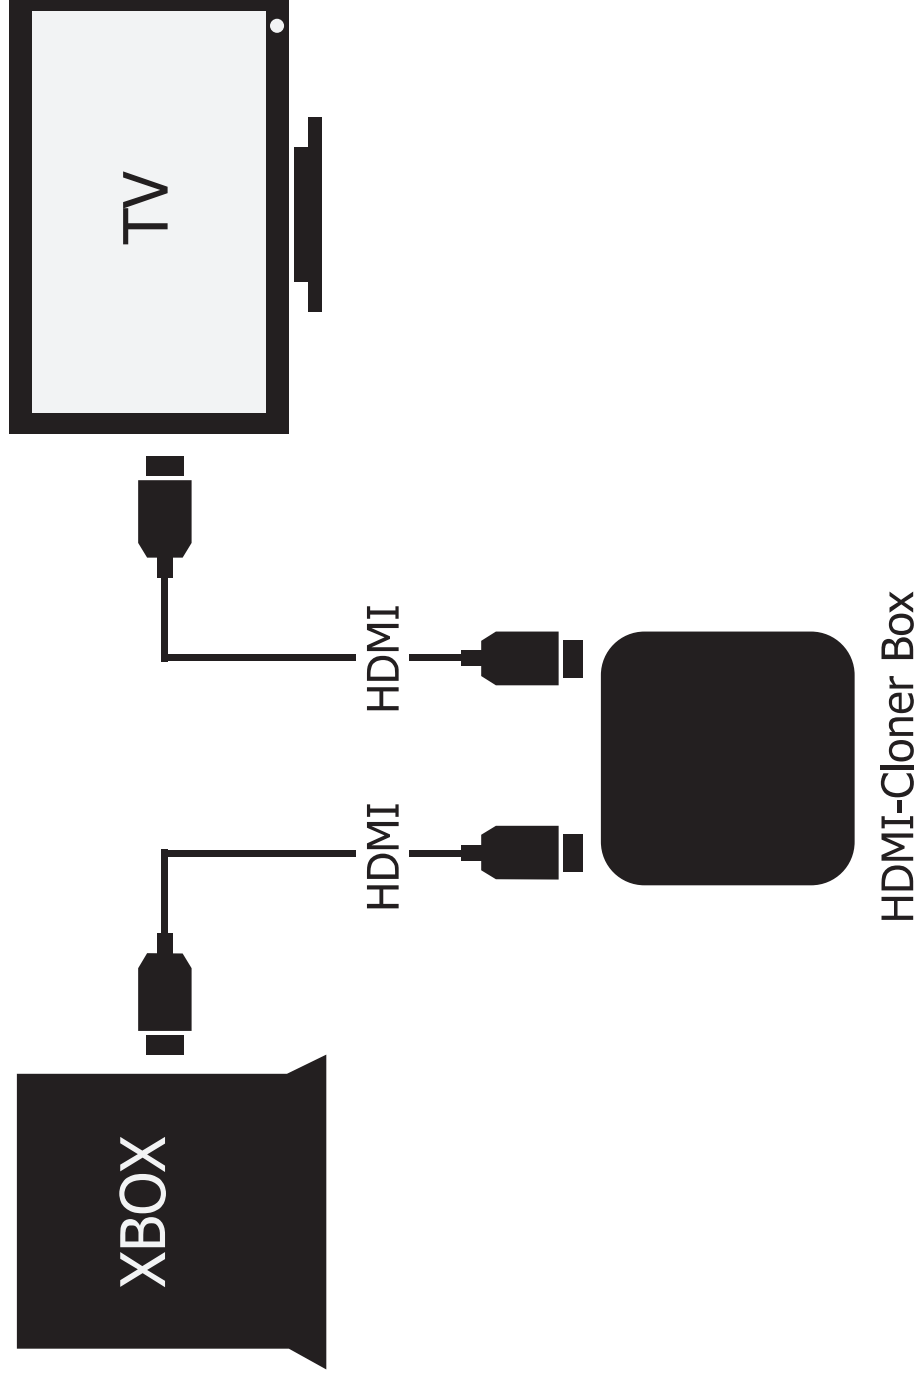


CONNECTION GUIDES

English

1. Connect HDMI-Cloner Box from HDMI out to TV via an HDMI cable.
2. Connect Xbox 360/Xbox One to HDMI in on HDMI-Cloner Box via an HDMI cable.
3. Make sure gameplay is visible on TV screen.
4. Connect the HDD or USB stick to the USB port on HDMI-Cloner Box.

CONNECTION GUIDES

Nintendo Wii

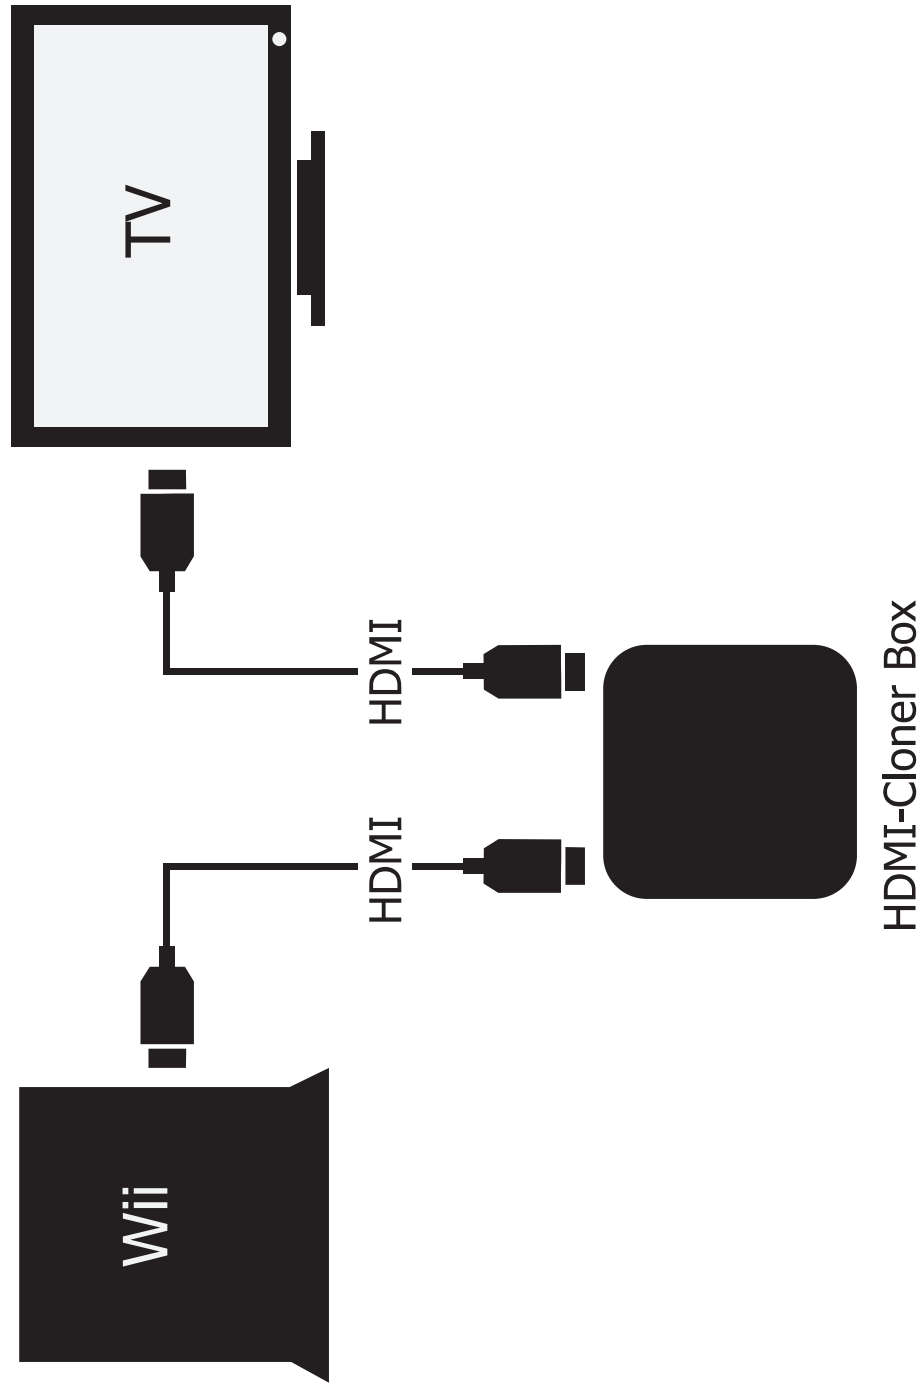

English

CONNECTION GUIDES


English

1. Connect all devices by HDMI cables.
2. Make sure gameplay is visible on TV screen.
3. Connect the HDD or USB stick to the USB port on HDMI-Cloner Box.

CONNECTION GUIDES

English

Set-top box/DVD/Blu-ray player/PC HD video output devices

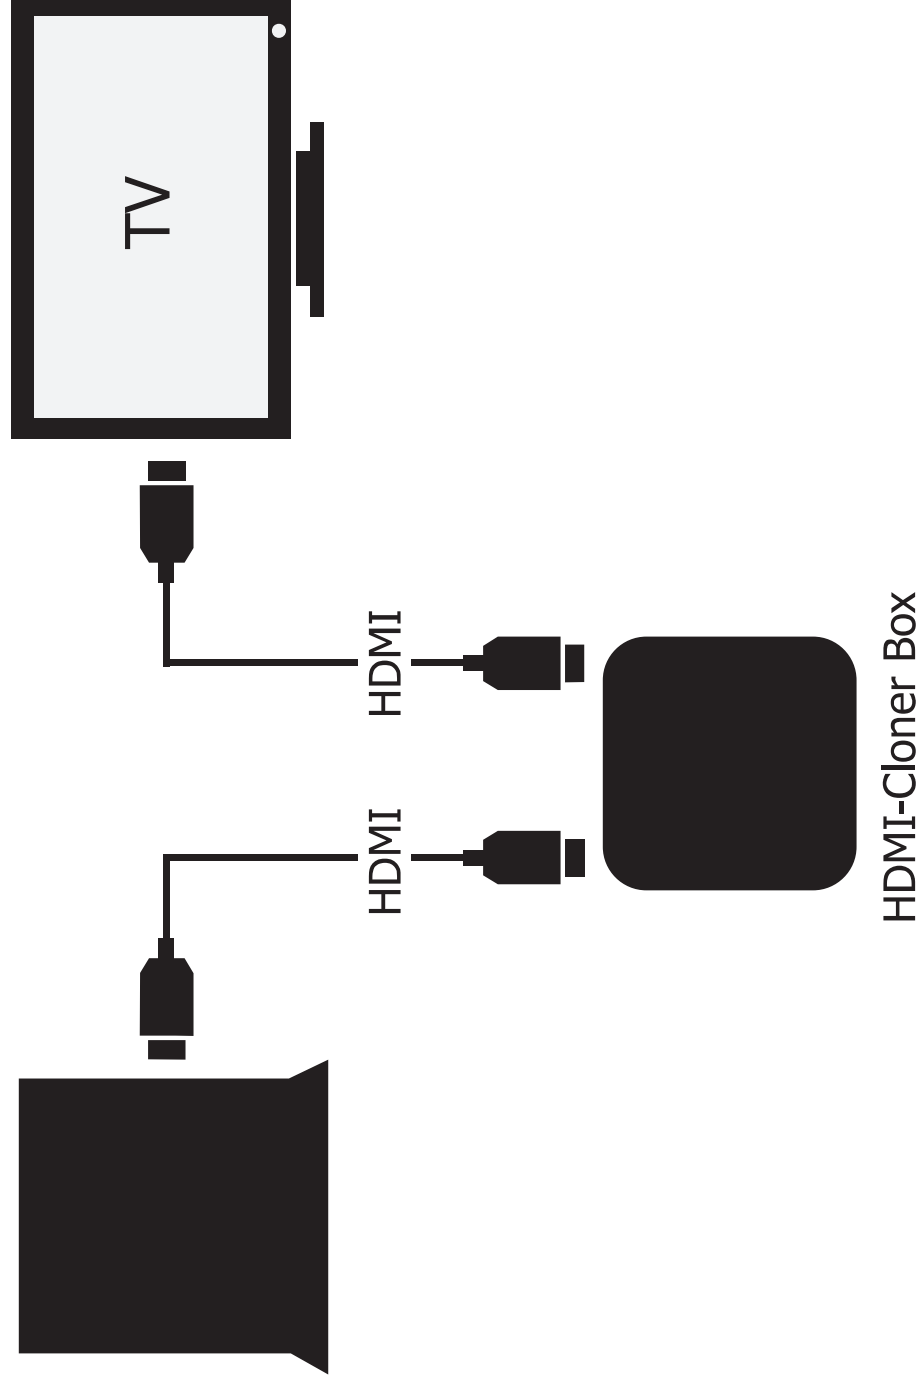

CONNECTION GUIDES

English

Your HDMI-Cloner Box can capture any video from any video source/device and all you need is the right ports/connections!

1. Connect HDMI-Cloner Box to TV via an HDMI cable.
2. Connect set-top box, DVD/Blu-ray player, PC or any other device to HDMI-Cloner Box.
3. Connect the HDD or USB stick to the USB port on HDMI-Cloner Box.

RECORDING/CAPTURE

How to:

1. Switch On Power. The button LED will illuminate Blue or Green.
2. Connect a USB storage device to the HDMI-Cloner Box USB port.
3. Prior to gameplay, press the REC button. Commence gameplay – it is now recording. The REC button will illuminate.
4. When gameplay is completed, press the REC/STOP button to stop recording.
5. The REC LED will flash several times. DO NOT remove the USB device as the file is being saved. The REC LED will turn off after the file is saved.

The HDMI-Cloner Box LED lights will illuminate different colours/ways to indicate functions.

LED Status Chart	
LED red	POWER ON
LED green	1080p/1080i
LED blue	720p/others
LED flashing	Recording/buffering

HDMI-Cloner Box

File saving

- When the HDD or USB storage is full, HDMI-Cloner Box stops recording and the REC LED will turn off.
- HDMI-Cloner Box saves files in MPEG-4 format.

Resolution

The resolution can be set at either 720p or 1080p for capture. Please note that not all games are produced at 1080p.

Switch between 720p and 1080p

If you press the ON/OFF button once, it works as ON/OFF.

If you press (hold it for a few seconds, about 3-5 seconds), it works as a switch between 720p and 1080p.

Recording time

HDMI-Cloner Box will record approximately 1GB per 10mins at either 720p and 1080p.

SAVING FILES

Supported resolutions

Input/output	1920 x 1080 (50p), 1920 x 1080 (60p)
	1920 x 1080 (24p), 1920 x 1080 (25p), 1920 x 1080 (30p)
	1920 x 1080 (50i), 1920 x 1080 (60i), 1280 x 1024 (60p)
	1280 x 720p (60p), 1280 x 768 (60p), 1280 x 800 (60p)
	720 x 480 (60i), 720 x 480 (50i)
	640 x 480 (60p), 720 x 480 (60p), 720 x 576 (50p)
Recording	1920 x 1080 (24p), 1920 x 1080 (25p), 1920 x 1080 (30p)
	1280 x 720 (50p), 1280 x 720 (60p)
	640 x 480 (60p), 720 x 480 (60p), 720 x 576 (50p)

PRODUCT SPECIFICATIONS

Capture format	MP4 (H.264)
Video format (input)	NTSC, PAL, PAL-60
Supported recording format	FAT, FAT32, NTFS
Input signals	HDMI
Output signals	HDMI (pass-through)
	USB 2.0
Bitrate	Max: 16Mbps
Maximum storage capacity	2TB
Power supply	DC 5V, 2A
Weight	150g
Dimensions	112x112x25mm

HDMI-Cloner Box will record approximately 1GB per 10mins at either 720p and 1080p.

Microphone Function

For best quality voice recording, please use good quality microphone.

To control voice recording, please adjust the volume of HDMI input source.